


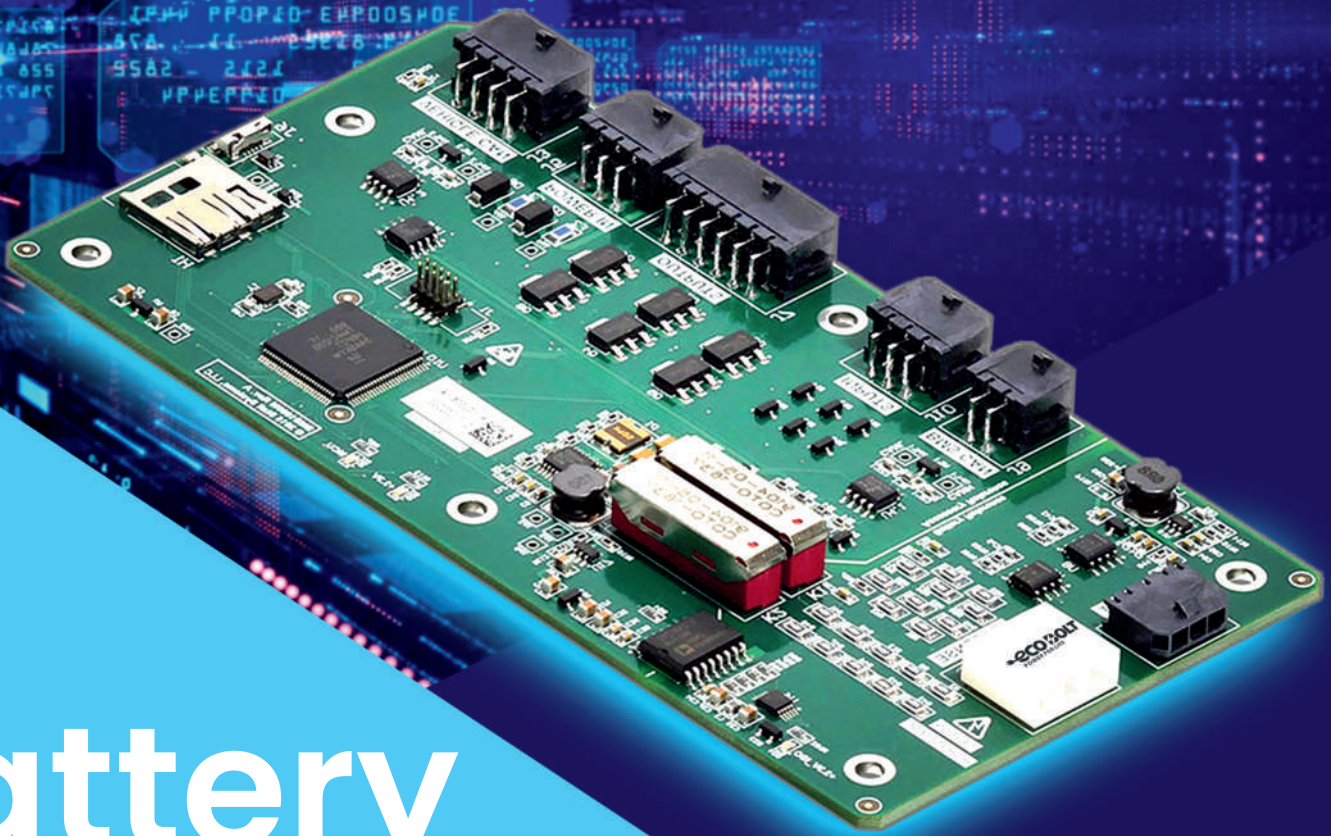

Battery

Management System (BMS)

Salient Features:

● MASTER BMS


The CMC (Cell Monitoring Circuit) is connected to cells, placed close to the battery module for achieving short sensor wire length and increasing accuracy.

● SLAVE BMS

The local BMS is a control unit built on single processor architecture in lockstep with achieving ASIL C integrity level.

● LONGER BATTERY LIFE

The BMS is customized for the longest life based on individual mission requirements.

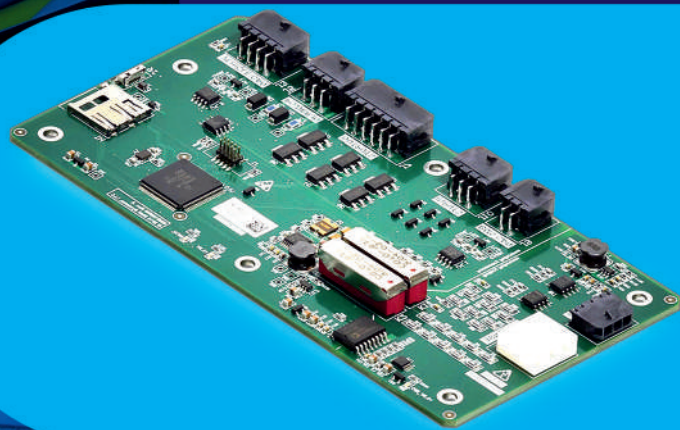

- ▶ Data Collection
- ▶ State Monitoring
- ▶ Safety Protection
- ▶ Charging Control
- ▶ Energy Management
- ▶ Equalization Management
- ▶ Thermal Management
- ▶ Information Management

Technical Specification:

PARAMETER	VALUE
Cell Voltage Measurement Range (V)	0 to 5
CAN Communication Standards	CAN2.0B
Operating Temperature (°C)	-40° to +85°
Master Slave Configuration	Yes
Cell Balancing	Yes
Operating Voltage Range	18- 32 V
SoX Algorithms	SOC, SOP, SOH
Measurements Accuracy	Cell Voltage +/-5mV
	Module Temperature < 2%
	Pack Voltage < 1%
	Pack Current < 2%
	SoC < 5%
	SoH < 5%
Fault Diagnostic	Internal Battery Fault External Battery Fault
Safety Measurements	Isolation, HVIL, Thermal, Reverse Polarity, Over and Under Voltage, Temperature, and Current, Short Circuit

REG. OFFICE: JBM CADMIUM PVT. LTD. 601, Hemkunt Chambers 89 Nerhu Place, Delhi, 110019, IN

CORPORATE OFFICE: Plot No. 9, Institutional Area, Sector 44, Delhi-NCR-122003

Tel: +91-124-4674500, 4674550, **Web:** www.jbmtesco.com